



FURON®
Pure Performance

Furon® 2" Check Valve

Media Actuated (2" Orifice)



Description

Furon® 2" Check Valves offer a reliable solution to preventing reverse flow in high purity fluid handling applications. Constructed from high-purity fluoropolymers and featuring a 100% PTFE spring, Furon 2" Check Valves are designed to crack at pressures less than 1 PSIG (0.07 bar) and are rated for media pressures up to 80 PSIG (5.5 bar).

Patented O-ring free sealing and fluoropolymer spring design reduces the potential for leakage and media contamination and increases product life. The Furon 2" Check Valve is engineered to operate in any orientation, and is suitable for use in ultra-pure or highly corrosive media.

Applications

- To prevent drain-down of chemical delivery lines
- To prevent backflow in process delivery manifolds
- Transfer of aggressive or ultrapure chemicals commonly used in the semiconductor and chemical processing industries
- Suitable for use in abrasive slurry

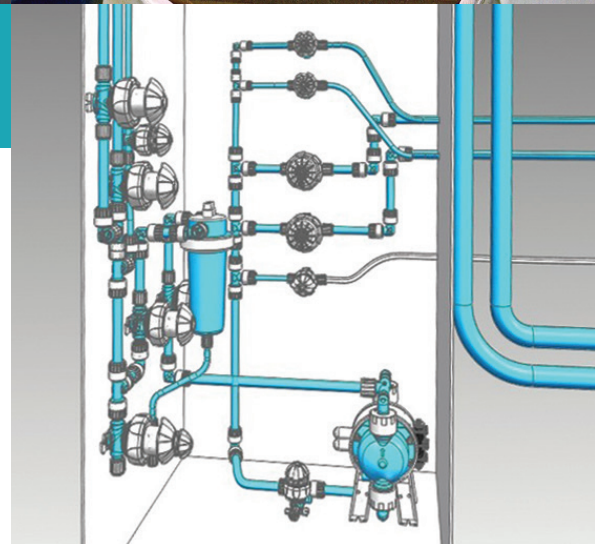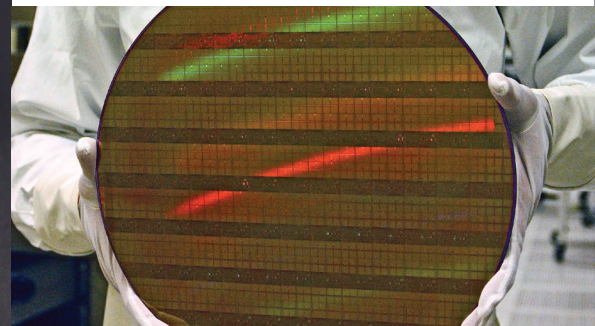

Features and Benefits

- 100% high-purity PFA construction
- Metal and O-Ring free design
- <1 PSIG (0.07 bar) cracking pressure
- Zero dead volume body seal with no wetted thread areas
- High-purity PTFE spring

[ASK AN ENGINEER](#)


SAINT-GOBAIN

Furon 2" Check Valve

Part Number	End Connection	Orifice (in.)	Port Size (in.)	A	B
LCV7-3224-NM	FuseBond™	2	1.5	6.8" (172.72 mm)	1.90" (48.26 mm)
LCV7-3232-NM	FuseBond™	2	2	7" (177.80 mm)	2.07" (52.58 mm)


Technical Specifications

Max. Operating Pressure	80 psig (5.5 bar)@ Room Temperature
Cracking Pressure	<1 psig (0.07 bar)
Cv Flow Factor	40
Max. Operating Temperature	203°F (95°C)
Body	PTFE
Spring	PTFE
Mounting Position	Any Orientation

Options

- Other end connections not listed, including **Nippon Pillar Super 300®**

[Please consult factory](#) for further details >>

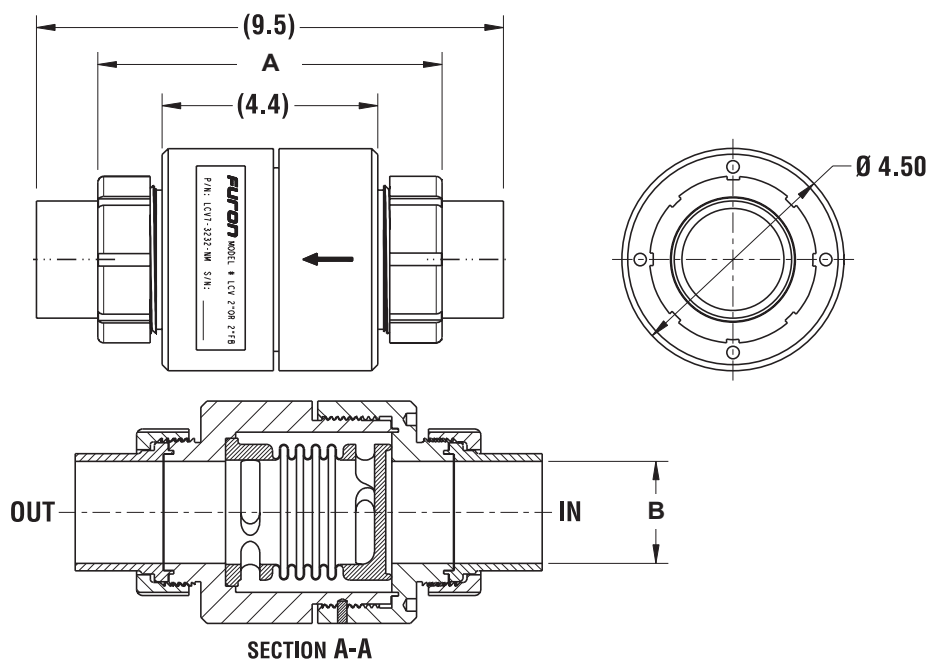

Saint-Gobain Performance Plastics
 7301 Orangewood Avenue
 Garden Grove, CA 92841
 1-800-833-5661
 Tel: (714) 630-5818
 Fax: (714) 688-2614

www.processsystems.saint-gobain.com

NOTE: The data and details given in this document are correct and up to date. This document is intended to provide information about the product and possible applications. This document is not the product specification and does not provide specific features, nor does it guarantee product performance in specific applications. Saint-Gobain cannot anticipate or control the conditions of the field and for this reason strongly recommends that practical tests are conducted to ensure that the product meets the requirements of a specific application.

Furon®, FlareGrip® and FuseBond™ are registered trademarks of Saint-Gobain Performance Plastics. Nippon Pillar Super 300® is a registered trademark of Nippon Pillar Packing Co..

IMPORTANT: It is the user's responsibility to ensure the suitability and safety of Saint-Gobain Performance Plastics products for all intended uses and that the components to be used comply with all applicable regulatory requirements. Saint-Gobain Performance Plastics assumes no responsibility for any product failures that occur due to misuse arising out of the design, fabrication or application of the products into which they are incorporated.

WARRANTY: For a period of 12 months from the date of first sale, Saint-Gobain Performance Plastics warrants this product to be free of defects in materials and workmanship. The only obligation under any applicable product warranty will be to replace any portion proving defective, or at our option, to refund the purchase price thereof. **THIS IS THE EXCLUSIVE WARRANTY AND IS EXPRESSLY IN LIEU OF ANY AND ALL OTHER OBLIGATIONS, GUARANTEES, WARRANTIES AND REPRESENTATIONS. SAINT-GOBAIN PERFORMANCE PLASTICS DISCLAIMS ALL IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.**